


Options for

DINO lightweight

Mobile Elevating Work Platforms

**DINO Self propelled MEWPs /
DINO Lightweight 4x4**

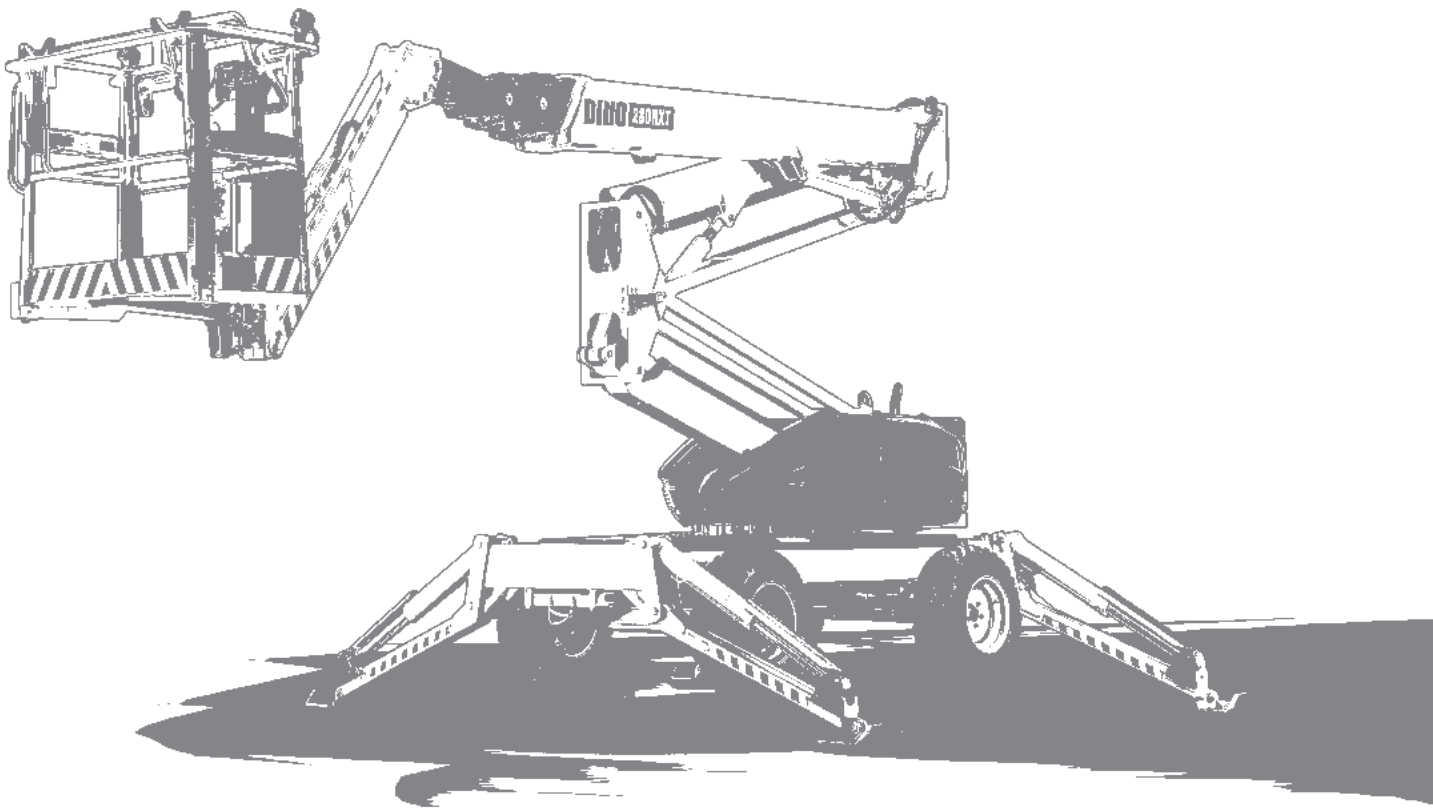

Valid for deliveries 1.1.-31.12.2024

DINO *RXT/E Series*

DINOlift

UP TO THE JOB

STANDARD EQUIPMENT

DINO	220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
MyDINO Telematics	std	std	std	std	std	std
Continuous rotation of the boom	std	std	std	std	std	std
Basket rotation	std 180°	std 180°	std 180°	std 180°	std 180°	std 180°
AC socket in the basket x 2	std	std	std	std	std	std
Proportional controls	std	std	std	std	std	std
Oscillating axle	std	std	std	std	std	std
Automatic chassis levelling	std	std	std	std	std	std
Four wheel drive	std	std	std	std	std	std
Turf tires	std	std	std	std	std	std
Arctic kit (block heater, start battery charger)	std	-	-	std	-	-
USB power outlet in basket	std	std	std	std	std	std
Air / water line to the basket (max 200bar, 93°C)	std	std	std	std	std	std
Kubota diesel engine EU V 18,5kW	std	-	-	std	-	-

OPTIONS

OPTIONS FOR ENHANCED USE

Rough terrain traction tires instead of / in addition to standard tires

- Voimakaskuvioinen maastorengas vakioireenkaan tilalle / lisäksi
- Terrängdäck istället för / utöver standarddäck
- Haftreifen für unwegsames Gelände statt / zusätzlich zu den Standardreifen

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Instead of std tires					
Option	Option	Option	Option	Option	Option
In addition to std tires incl. wheels					
Option	Option	Option	Option	Option	Option



Trelleborg AW305 special wide turf tires instead of / in addition to std tires

- Trelleborg AW305 erikoisleveät nurmikoreenkaat vakioireenkaiden sijaan / lisäksi
- Trelleborg AW305 extra breda gräsdäck istället för / utöver standarddäck
- Trelleborg AW305 speziell breite Rasenreifen statt / zusätzlich zu den Standardreifen

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Instead of std tires					
Option	Option	Option	Option	Option	Option
In addition to std tires incl. wheels					
Option	Option	Option	Option	Option	Option



Hydraulic generator 3.5 kW

- Hydrauligeneraattori 3,5 kW
- Hydraulisk generator 3,5 kW
- Hydraulikgenerator 3,5 kW

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	-	-	Option	-	-



Electric motor 230 VAC for boom movements only*

- Sähkömoottori 230 VAC puomiston liikkeisiin*
- Elmotor 230 VAC för bomrörelser*
- Elektromotor 230 VAC, nur für Auslegerbewegungen*

* Note! Electrical operation for boom movements only, not for driving or outriggers

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	-	-	Option	-	-



DINO Battery Charger, generator for charging batteries when 230VAC is not available

- DINO Battery Charger, generaattori akkujen lataamista varten, kun verkkovirtaa ei ole saatavilla
- DINO Battery Charger generator för laddning då nätström inte finns tillgänglig
- DINO Battery Charger, Generator zum Laden der Batterien, wenn kein 230V-Anschluss verfügbar ist

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
-	Option	Option	-	Option	Option



Air compressor 400 l / 12 bar

- Paineilmakompressori 400 l / 12 bar
- Luftkompressor 400 l / 12 bar
- Druckluftkompressor 400 l / 12 bar

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	-	-	Option	-	-



OPTIONS FOR ENHANCED MATERIAL HANDLING

DINO SkyRack – plate & tube rack max 100 kg, 3m²*

- DINO SkyRack – levy- & putkiteline, maks. kuorma 100 kg, 3 m²
- DINO SkyRack – skivlyft & rörlyft, max. belastning 100 kg, 3 m²
- DINO SkyRack – Platten- & Rohrgestell, max. Belastung 100 kg, 3 m²

* Available for std basket & XL-basket



220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option

LED working lights

- LED työvalot
- LED arbetsbelysning
- LED Arbeitslichter


220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Rack for tools & accessories, removable

- Työkaluteline, irrotettava
- Verktygsställning, avtagbar
- Gestell für Werkzeuge, abnehmbar

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option

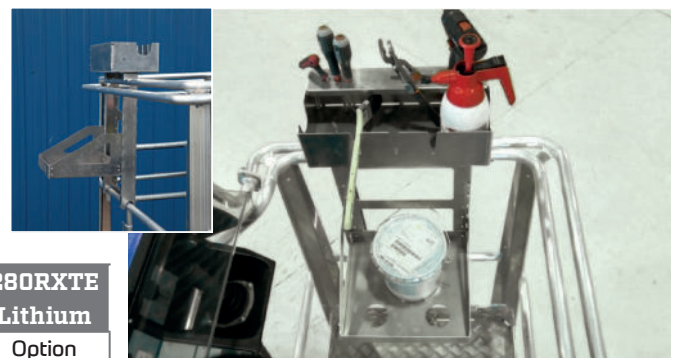

12V power outlet in the basket

- 12V-liitäntä korissa
- 12V-uttag i korgen
- 12V-Ausgang im Korb

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



DINO Safe Guard, secondary guarding, including AV warning

- DINO Safe Guard puristumisenestosuojaja AV-hälytyksellä
- DINO Safe Guard klämskydd med larmsignal
- DINO Safe Guard sekundäres Schutzsystem mit Alarmsignal

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Anemometer

- Tuulimittari
- Vindmätare
- Windmesser

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Basket load sensor

- Korikuormananturi
- Lastsensor för korgen
- Korblastsensor

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Entry stairs for the basket together with higher boom rest position

- Portaat koriin yhdessä korkeamman puomin tuen kanssa
- En stege till korgen gör att bommen kan vila i en högre position.
- Korb-Zugangsleiter in Verbindung mit höherer Ruheposition des Auslegers

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



OPTIONAL BASKET CONFIGURATIONS

One person basket (0.7 x 0.8 m) instead of / in addition to std basket

- Yhden hengen työkori (0,7 x 0,8 m) std korin sijasta / lisäksi
- 1-personskorg (0,7 x 0,8 m) istället för / utöver std korg
- 1-Person Korb (0,7 x 0,8 m) statt dem / zusätzlich zum Standardkorb

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Instead of std basket					
Option	Option	Option	Option	Option	Option
In addition to std basket					
Option	Option	Option	Option	Option	Option



XL-basket for two persons (0.75 x 1.6 m), SWL 250 kg, instead of std basket, incl. basket load sensor

- 2 hengen XL-kori (0,75 x 1,6 m), korikuorma 250 kg, std-korin sijasta, sis. korikuormananturin
- XL-korg för två personer, (0,75 x 1,6 m), 250 kg korgkapacitet, inkl. lastsensor på korgen
- XL-Korb für zwei Personen, (0,75 x 1,6 m), 250 kg Korblast, inkl. Korblastsensor

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



OTHER OPTIONS

Particle filter incl. by-pass valve

- Hiukkassuodatin ohitusventtiilillä
- Partikelfilter med by-pass ventil
- Partikelfilter inkl Umgehungsventil

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	-	-	Option	-	-



Hydraulic oil cooler for hot environment

- Hydraulioiljyn jäädytyn kuumaan työskentely-ympäristöön
- Oljekylare för varm miljö
- Hydraulikölkühler für Bedingungen mit erhöhter Umgebungstemperatur

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option

Thermometer / temperature limiter

- Lämpötilarajakytkin
- Temperaturgränsbrytare
- Temperatur Endschalter

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Spikes for outrigger pads

- Piikkilevyt tukijalkoihin
- Vinterplattor för stödben
- Winterstützen

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Fire extinguisher, 6 kg, powder, incl. a storage box in the frame member.

- Jauhesammutin, 6 kg, sis. säilytyslaatikon asennetuna nostimen alustaan
- 6 kilos pulver-släckare, monterad i en förvaringslåda på chassit.
- Feuerlöscher, 6 Kg, Pulver, inkl. Aufbewahrungsbox und Aufnahme

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Extra outrigger pads and brackets 600 x 600 x 30 mm

- Maalevyt ja telineet 600 x 600 x 30 mm
- Stödbensplattor och förvaringsställning 600 x 600 x 30 mm
- Stützplatten und Halterung 600 x 600 x 30 mm

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



LED driving lights*

- LED-ajovalot*
- LED körljus*
- LED Scheinwerfer*

* LED lights on each far end of the machine to provide illumination during loading and unloading

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



LED flashing warning light

- LED vilkkuva varoitusvalo
- LED blinkande varningsljus
- LED Kennblitzleuchte

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



LED flashing warning light on each outrigger with protective cover

- LED vilkkuva varoitusvalo tukijaloissa suojakatteella
- LED blinkande varningsljus på varje stödben med skyddskåpa
- LED Kennblitzleuchte auf jeder Stütze mit Schutzabdeckung

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Special color (RAL color map)*

- Erikoisväri (RAL-värikartta)*
- Specialfärg (RAL-färgkarta)*
- Sonderfarbe (RAL-Farbpalette)*

* Contact us for details

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Wheel chocks 4 pcs + brackets, mounted on the vehicle frame

- Rengaskiilat 4 kpl + teline asennettuna nostimen alustaan
- Hjulkiel, 4st + fästen på chassit
- Unterlegkeile, 4 St. mit Halter, an den Fahrzeugrahmen montiert

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



Ground lead

- Maadoitusjohdin
- Jordledning
- Erdungsleitung

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option

- **Chalwyn valve (ATEX approval)**
- **Spark arrestor (ATEX approval)**
- **Remote battery isolator (ATEX options)**

- Chalwyn-venttiili (ATEX-hyväksyntä)
- Kipinöinnin esto (ATEX-hyväksyntä)
- ATEX-hyväksytyt päävirtakatkaisija

- Chalwyn-ventil (ATEX-godkänd)
- Gnistskydd (ATEX-godkänd)
- ATEX-godkänd huvudströmbrytare

- Chalwyn-Ventil (ATEX Genehmigung)
- Funkenfänger (ATEX Genehmigung)
- Batteriehauptchalter (ATEX Genehmigung)

220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
Option	Option	Option	Option	Option	Option



DINO	220RXT	220RXTE AGM	220RXTE Lithium	280RXT	280RXTE AGM	280RXTE Lithium
STANDARD EQUIPMENT						
MyDINO Telematics	std	std	std	std	std	std
Continuous rotation of the boom	std	std	std	std	std	std
Basket rotation	std 180°	std 180°	std 180°	std 180°	std 180°	std 180°
AC socket in the basket x 2	std	std	std	std	std	std
Proportional controls	std	std	std	std	std	std
Oscillating axle	std	std	std	std	std	std
Automatic chassis levelling	std	std	std	std	std	std
Four wheel drive	std	std	std	std	std	std
Turf tires	std	std	std	std	std	std
Arctic kit (block heater, start battery charger)	std	-	-	std	-	-
USB power outlet in basket	std	std	std	std	std	std
Air / water line to the basket (max 200bar, 93°C)	std	std	std	std	std	std
Kubota diesel engine EU V 18,5kW	std	-	-	std	-	-
Battery pack	-	AGM 250Ah	Lithium 288Ah	-	AGM 250Ah	Lithium 288Ah
Electric motor 15/20kW (cont./peak)	-	std	std	-	std	std
OPTIONS						
Options for enhanced use						
Rough terrain traction tires instead of std tires	Option	Option	Option	Option	Option	Option
Rough terrain traction tires in addition to std tires, incl. wheels	Option	Option	Option	Option	Option	Option
Trelleborg AW305 special wide turf tires instead of std tires	Option	Option	Option	Option	Option	Option
Trelleborg AW305 special wide turf tires in addition to std tires, incl. wheels	Option	Option	Option	Option	Option	Option
Hydraulic generator 3,5kW	Option	-	-	Option	-	-
Electric motor 230 VAC for boom movements only	Option	-	-	Option	-	-
DINO Battery Charger	-	Option	Option	-	Option	Option
Air compressor, 400l / 12bar	Option	-	-	Option	-	-
Options for enhanced material handling						
DINO SkyRack, plate & tube rack, max loading 100 kg, 3m²	Option	Option	Option	Option	Option	Option
Options for basket						
LED working lights	Option	Option	Option	Option	Option	Option
Rack for tools & accessories (removable)	Option	Option	Option	Option	Option	Option
12V power outlet in the basket	Option	Option	Option	Option	Option	Option
DINO Safe Guard, secondary guarding including AV warning	Option	Option	Option	Option	Option	Option
Anemometer	Option	Option	Option	Option	Option	Option
Basket load sensor	Option	Option	Option	Option	Option	Option
Entry stairs for the basket together with higher boom rest position	Option	Option	Option	Option	Option	Option
Optional basket configurations						
One person basket (0.7 x 0.8 m) instead of std basket	Option	Option	Option	Option	Option	Option
One person basket (0.7 x 0.8 m) in addition to std basket	Option	Option	Option	Option	Option	Option
XL basket for two persons (0,75 x 1,6m) SWL 250kg, instead of std basket, incl. basket load sensor	Option	Option	Option	Option	Option	Option
Other options						
Particle filter incl by-pass valve	Option	-	-	Option	-	-
Hydraulic oil cooler for hot environment	Option	Option	Option	Option	Option	Option
Thermometer/ Temperature limit switch	Option	Option	Option	Option	Option	Option
Spikes for outrigger plates	Option	Option	Option	Option	Option	Option
Fire extinguisher, 6 kg, powder, incl. a storage box on the frame member	Option	Option	Option	Option	Option	Option
Outrigger pads + brackets, 600x600x30 mm	Option	Option	Option	Option	Option	Option
LED driving lights	Option	Option	Option	Option	Option	Option
LED flashing warning light on engine cover	Option	Option	Option	Option	Option	Option
LED flashing warning light on each outrigger with protective cover	Option	Option	Option	Option	Option	Option
Special colour (RAL color map)	Option	Option	Option	Option	Option	Option
Wheel chocks 4 pcs + brackets, mounted on the frame member	Option	Option	Option	Option	Option	Option
Ground lead, spike type	Option	Option	Option	Option	Option	Option
Chalwyn valve (ATEX approval)	Option	Option	Option	Option	Option	Option
Spark arrester (ATEX approval)	Option	Option	Option	Option	Option	Option
Remote battery isolator (ATEX options)	Option	Option	Option	Option	Option	Option

DINOLIFT Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

www.dinolift.com

Technical specifications are subject to change without prior notice.