


Options for

DINO lightweight

Mobile Elevating Work Platforms

DINO Trailer mounted MEWPs / DINO Telescopic

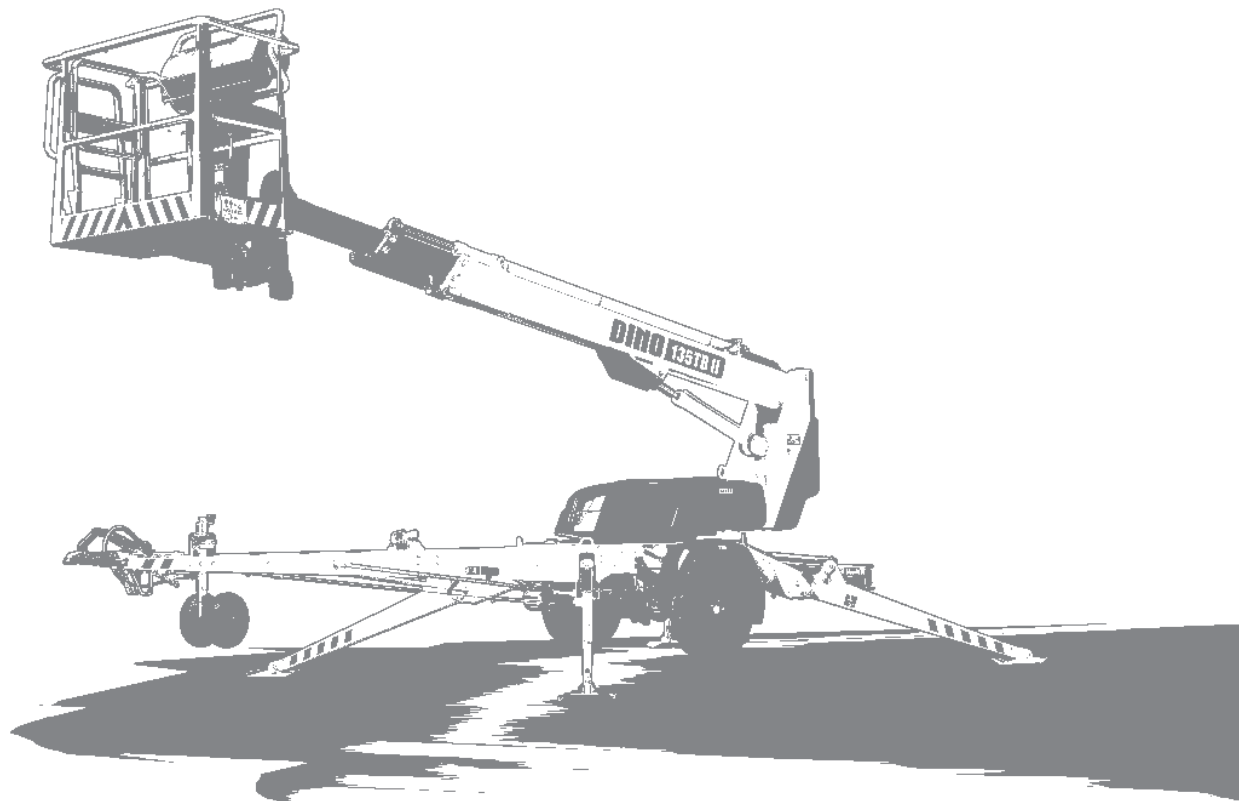

Valid for orders

1.1.-31.12.2024

DINO T/TB/TL II Series

DINOlift

UP TO THE JOB

STANDARD EQUIPMENT

STANDARD EQUIPMENTS	DINO T II					DINO TB II		
	105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
MyDINO Telematics	std	std	std	std	std	std	std	std
230V AC-motor	std	std	std	std	std	-	-	-
24V DC-motor	-	-	-	-	-	std	std	std
Continuous rotation of the boom	+/-355	std	std	std	std	std	std	std
Basket rotation 90°	-	-	std	std	std	-	std	std
Driving system	option	std	std	std	std	std	std	std
AC socket in the basket x 2	std	std	std	std	std	std	std	std
USB power outlet in basket	-	-	std	std	std	-	std	std
Nose-wheel	std	std	std	std	std	std	std	std
Proportional controls	1/2-speed	1/2-speed	std	std	std	1/2-speed	std	std
Hour meter	std	std	std	std	std	std	std	std
Activated emergency circuit-LED	std	std	std	std	std	std	std	std
Easy-entry gate in basket, exchangeable finger protection	-	-	std	std	std	-	std	std
Stone chip protection tape (for front outriggers)	std	std	std	std	std	std	std	std

OPTIONS

Petrol engine, T II-models

- Bensiinimoottori, T II-mallit
- Bensinmotor, T II-modeller
- Benzinmotor, T II-Modelle

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	-	-



Petrol engine for DINO 120T

- Bensiinimoottori, DINO 120T
- Bensinmotor, DINO 120T
- Benzinmotor, DINO 120T

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	option	-	-	-	-	-	-



2.2 kW generator + bracket for charging batteries, TB II-models (A)*

- 2.2 kW generaattori + teline akkujen lataamista varten, TB II-mallit (A)*
- 2.2 kW generator + ställning för att ladda batterierna, TB II-modeller (A)*
- 2.2 kW generator zur Ladung der Batterien inkl. Halter, TB II-Modelle (A)*

* (A) Check option matrix on page 9

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	-	-	-	option	option	option



2 joystick controls

- 2 joystickin ohjaus
- Styrning med 2 joystickar
- 2 Joystick-Steuerung

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
std	std	option	option	option	std	option	option



Lockable tool / harness box

- Lukittava työkalulaatikko
- Låsbar verktygslåda
- Zusperrbarer Kasten für Werkzeuge

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	option	option	option	option	option	option	option



Extra outrigger pads 500 x 500 x 40 mm + bracket (A)*

- Tukijalkalevyt, 500 x 500 x 40 mm + teline (A)*
- Stödbensplattor, 500 x 500 x 40 mm + förvaringsställning (A)*
- Stützplatten, 500 x 500 x 40 mm inkl. Halterung (A)*

* (A) Check option matrix on page 9

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
–	option	option	option	option	option	option	option



Extra outrigger pads for DINO 105TL 300 x 300 x 30 mm + bracket

- Tukijalkalevyt, DINO 105TL, 300 x 300 x 30 mm + teline
- Stödbensplattor för DINO 105TL, 300 x 300 x 30 mm + förvaringsställning
- Stützplatten, für DINO 105TL, 300 x 300 x 30 mm inkl. Halterung

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
option	–	–	–	–	–	–	–



LED outrigger support indicator

- Tukijalkaledit
- LED stödbensindikator
- LED Stützenüberwachung

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
option	option	option	option	option	option	option	option



Remote control for driving (B)*

- Kaapeliohjaus ajolaitteelle (B)*
- Kabelstyrning för drivsystem (B)*
- Kabelfernbedienung für Fahrtrieb (B)*



* (B) Includes tool/harness box

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	option	option	option

Remote control for driving & automatic levelling (C)*

- Kaapeliohjaus ajolaitteelle & automaattitasaus (C)*
- Kabelstyrning för drivsystem & automatisk nivellering (C)*
- Kabelfernbedienung für Fahrtrieb & automatische Nivellierung (C)*

* (C) Includes tool/harness box, not possible to retrofit

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	option	option



Remote control for driving & automatic levelling & hydraulic coupling of traction drive on/off (C)*

- Kaapeliohjaus ajolaitteelle & automaattitasaus & ajolaitteen hydraulinen kytkentä (C)*
- Kabelstyrning för drivsystem & automatisk nivellering och koppling av drivrullar (C)*
- Kabelfernbedienung für Fahrtrieb & automatische Nivellierung & hydraulische Kupplung des Fahrtriebes (C)*

* (C) Includes tool/harness box, not possible to retrofit

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	option	option



Special color (RAL color map)*

- Erikoisväri (RAL-värikartta)*
- Specialfärg (RAL-färgkarta)*
- Sonderfarbe (RAL-Farbpalette)*

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
option	option	option	option	option	option	option	option



DINO Safe Guard, secondary guarding, including AV warning

- DINO Safe Guard puristumisestostojo AV-hälytyksellä
- DINO Safe Guard klämskydd med larmsignal
- DINO Safe Guard sekundäres Schutzsystem mit Alarmsignal

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	option	option



LED traffic lights

- LED tieliikennevalot
- LED belysning
- LED Fahrzeugbeleuchtung

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	option	option



LED working lights

- LED työvalot
- LED arbetsbelysning
- LED Arbeitslichter

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	option	option



Spare wheel with bracket (A)*

- Vararengas telineellä (A)*
- Reservhjul inkl. förvaringsställning (A)*
- Ersatzrad inkl. Halterung (A)*

* (A) Check option matrix on page 9

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	option	option	option	option	option	option	option
Wheel only							
-	option	option	option	option	option	option	option



12V power outlet in basket

- 12V-liitäntä työkorissa
- 12V-uttag i korgen
- 12V-Ausgang im Korb


DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	-	-



Rack for tools & accessories, removable

- Työkaluteline, irrotettava
- Verktygsställning, avtagbar
- Gestell für Werkzeuge, abnehmbar

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	option	option

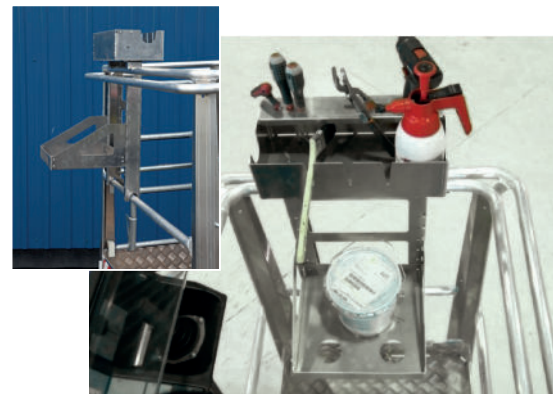

Towing eyelet


- Vetosilmukka
- Bogserögla
- Anhängerkupplungs-Öse

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	option	option	option	option	option	option	option



Spikes for outrigger pads

- Piikkilevyt tukijalkoihin
- Vinterplattor för stödbenen
- Winterstützen



DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	-	option	option	option	-	option	option

Anemometer

- Tuulimittari
- Vindmätare
- Windmesser



DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
-	option	option	option	option	option	option	option

Basket load sensor

- Korikuormananturi
- Lastsensor på korgen
- Korblastsensor

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
option	option	option	option	option	option	option	option



Thermometer / temperature limiter

- Lämpötilarajakytkin
- Temperaturgränsbrytare
- Temperatur Endschalter

DINO T II					DINO TB II		
105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
option	option	option	option	option	option	option	option



DINO T/TB/TL II	DINO T II					DINO TB II		
	105TL	120T	135T II	150T II	180T II	120TB	135TB II	150TB II
STANDARD EQUIPMENT								
MyDINO Telematics	std	std	std	std	std	std	std	std
230V AC-motor	std	std	std	std	std	-	-	-
24V DC-motor	-	-	-	-	-	std	std	std
Continuous rotation of the boom	+/-355	std	std	std	std	std	std	std
Basket rotation 90°	-	-	std	std	std	-	std	std
Driving system	option	std	std	std	std	std	std	std
AC socket in the basket x 2	std	std	std	std	std	std	std	std
USB power outlet in basket	-	-	std	std	std	-	std	std
Nose-wheel	std	std	std	std	std	std	std	std
Proportional controls	1/2-speed	1/2-speed	std	std	std	1/2-speed	std	std
Hour meter	std	std	std	std	std	std	std	std
Activated emergency circuit-LED	std	std	std	std	std	std	std	std
Easy-entry gate in basket, exchangeable finger protection	-	-	std	std	std	-	std	std
Stone chip protection tape (for front outriggers)	std	std	std	std	std	std	std	std
OPTIONS								
Petrol engine, T II-models	-	option	option	option	option	-	-	-
2.2kW generator +bracket, TB II-models (A)	-	-	-	-	-	option	option	option
2 joystick controls	std	std	option	option	option	std	option	option
Lockable tool/harness box	-	option	option	option	option	option	option	option
Extra outrigger pads + bracket, 500x500x40 (A)	-	option	option	option	option	option	option	option
Extra outrigger pads + bracket, 300x300x30	option	-	-	-	-	-	-	-
LED Outrigger support indicator	option	option	option	option	option	option	option	option
Remote control for driving (B)	-	-	option	option	option	option	option	option
Remote control for driving & automatic levelling (C)	-	-	option	option	option	-	option	option
Remote control for driving & automatic levelling & hydraulic coupling of traction drive on/off (C)	-	-	option	option	option	-	option	option
Special colour	option	option	option	option	option	option	option	option
DINO Safe Guard, secondary guarding, including AV warning	-	-	option	option	option	-	option	option
LED traffic lights	-	-	option	option	option	-	option	option
LED working lights	-	-	option	option	option	-	option	option
Spare wheel with bracket (A)	-	option	option	option	option	option	option	option
Spare wheel only	-	option	option	option	option	option	option	option
12V power outlet in basket	-	-	option	option	option	-	-	-
Rack for tools & accessories	-	-	option	option	option	-	option	option
Towing eyelet (different models available)	-	option	option	option	option	option	option	option
Spikes for outrigger plates	-	-	option	option	option	-	option	option
Anemometer	-	option	option	option	option	option	option	option
Basket load sensor	option	option	option	option	option	option	option	option
Thermometer/ temperature limit switch	option	option	option	option	option	option	option	option

- not available

(A) in case more than one of the (A) marked option in the machine, please contact sales@dinolift.com

(B) includes tool/harness box

(C) includes tool/harness box, not possible to retrofit

Dinolift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 11.7.2024