


Options for

DINO lightweight

Mobile Elevating Work Platforms

**DINO Trailer mounted MEPWs /
DINO Articulated**

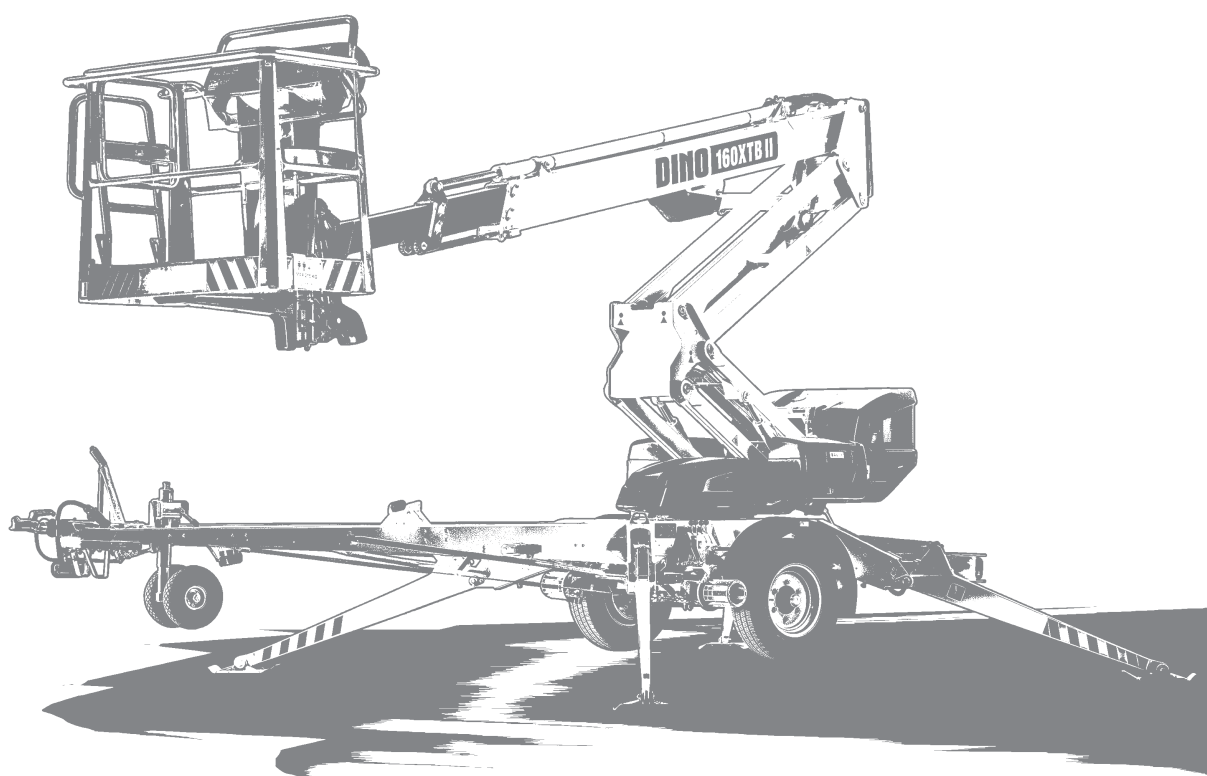

Valid for orders

1.1.-31.12.2024

DINO XT/B II Series

DINOLift
UP TO THE JOB

STANDARD EQUIPMENT

STANDARD EQUIPMENT	DINO XT II				DINO XTB II		
	160XTII	180XTII	210XTII	260XTD	160XTB II	180XTB II	210XTB II
MyDINO Telematics	std	std	std	std	std	std	std
230V AC-motor	std	std	std	std	-	-	-
24V DC-motor	-	-	-	-	std	std	std
Continuous rotation of the boom	std	std	std	std	std	std	std
Basket rotation	std, 180°	std, 180°	std, 180°	std, 90°	std, 180°	std, 180°	std, 180°
Driving system	std	std	std	std	std	std	std
Remote control for driving	std	std	std	std	std	std	std
AC socket in the basket x 2	std	std	std	std	std	std	std
USB power outlet in basket	std	std	std	std	std	std	std
Nose-wheel	std	std	std	std	std	std	std
Proportional controls	std	std	std	std	std	std	std
Hour meter	std	std	std	std	std	std	std
Activated emergency circuit-LED	std	std	std	std	std	std	std
Easy-entry gate in basket, exchangeable finger protection	std	std	std	std	std	std	std
Stone chip protection tape (for front outriggers)	std	std	std	std	std	std	std

OPTIONS

Petrol engine

- Bensinimoottori
- Bensinmotor
- Benzinmotor

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	std	std	-	-	-



Diesel engine

- Dieselmoottori
- Dieselmotor
- Dieselmotor

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	-	-	-



2.2 kW generator + bracket for charging batteries, XT B II-Models (A)*

- 2.2 kW generaattori + teline akkujen lataamista varten (A)*
- 2.2 kW generator + ställning för att ladda batterierna (A)*
- 2.2 kW generator zur Ladung der Batterien inkl. Halter, TB II-Modelle (A)*

* (A) Check option matrix on page 8

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
-	-	-	-	option	option	option



2 joystick controls

- 2 joystickin ohjaus
- Styrning med 2 joystickar
- 2 Joystick-Steuerung

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option



Lockable tool / harness box

- Lukittava työkalulaatikko
- Låsbar verktygslåda
- Zusperrbarer Kasten für Werkzeuge

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



Extra outrigger pads 500 x 500 x 40 mm + bracket (A)*

- Tukijalkalevyt, 500 x 500 x 40 mm + teline (A)*
- Stödbensplattor, 500 x 500 x 40 mm + förvaringsställning (A)*
- Stützplatten, 500 x 500 x 40 mm inkl. Halterung (A)*

* (A) Check option matrix on page 8

DINO XT II				DINO XT B II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	-	option	option	option



LED outrigger support indicator

- Tukijalkaledit
- LED stödbensindikator
- LED Stützenüberwachung

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option



Remote control for driving and automatic levelling (B)*

- Kaapeliohjaus ajolaitteelle & automaattitasaus (B)*
- Kabelstyrning för drivsystem & automatisk nivellering (B)*
- Kabelfernbedienung für Fahrtrieb & automatische Nivellierung (B)*

* (B) includes tool/harness box, not possible to retrofit

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option



Remote control for driving & automatic levelling & hydraulic coupling of traction drive on/off (B)*

- Kaapeliohjaus ajolaitteelle & automaattitasaus & rullien hydraulinen kytkentä (B)*
- Kabelstyrning för drivsystem & automatisk nivellering & hydraulisk koppling av drivrullar (B)*
- Kabelfernbedienung für Fahrtrieb & automatische Nivellierung & hydraulische Kupplung des Fahrtriebs (B)*

* (B) includes tool/harness box, not possible to retrofit

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	std	option	option	option



Special color

- Erikoisväri
- Specialfärg
- Sonderfarbe

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



DINO Safe Guard, secondary guarding, including AV warning

- DINO Safe Guard puristumisenestosuojaa AV-hälytyksellä
- DINO Safe Guard klämskydd med larmsignal
- DINO Safe Guard sekundäres Schutzsystem mit Alarmsignal

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



DINO SkyRack – plate & tube rack max loading 100 kg, 3m²

- DINO SkyRack – levy- & putkiteline, maks. kuorma 100 kg, 3 m²
- DINO SkyRack – skivlyft & rörlyft, max. belastning 100 kg, 3 m²
- DINO SkyRack – Platten- & Rohrgestell, max. Belastung 100 kg, 3 m²

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	-	option	option	option



LED traffic lights

- LED tieliikennevalot
- LED belysning
- LED Fahrzeugbeleuchtung

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



LED working lights

- LED työvalot
- LED arbetsbelysning
- LED Arbeitslichter

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



Spare wheel with bracket (A)*

- Vararengas telineellä (A)*
- Reservhjul inkl. förvaringsställning (A)*
- Ersatzrad inkl. Halterung (A)*

* (A) Check option matrix on page 8

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option
Wheel only						
option	option	option	option	option	option	option



12V power outlet in basket

- 12V-liitäntä työkorissa
- 12V-uttag i korgen
- 12V-Ausgang im Korb


DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	-	-	-



Rack for tools & accessories, removable

- Työkaluteline, irrotettava
- Verktygsställning, avtagbar
- Gestell für Werkzeuge, abnehmbar

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option

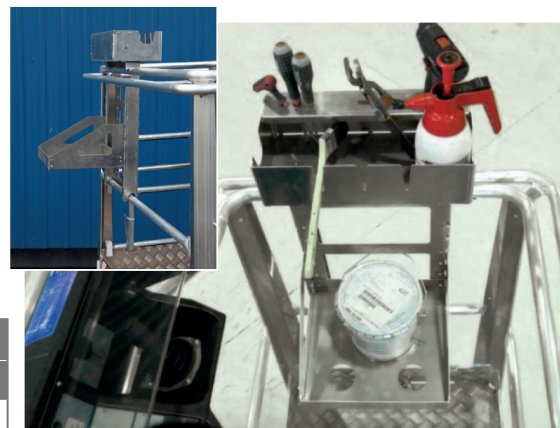

Towing eyelet

- Vetosilmukka
- Bogserögla
- Anhängerkupplungs-Öse

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



Spikes for outrigger pads

- Piikkilevyt tukijalkoihin
- Vinterplattor för stödbenen
- Winterstützen



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option

Anemometer

- Tuulimittari
- Vindmätare
- Windmesser



DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option

Basket load sensor

- Korikuormananturi
- Lastsensor på korgen
- Korblastsensor

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



Thermometer / temperature limiter

- Lämpötilarajakytkin
- Temperaturgränsbrytare
- Temperatur Endschalter

DINO XT II				DINO XTB II		
160XT II	180XT II	210XT II	260XTD	160XTB II	180XTB II	210XTB II
option	option	option	option	option	option	option



DINO XT/B II	DINO XT II				DINO XTB II		
	160XTII	180XTII	210XTII	260XTD	160XTB II	180XTB II	210XTB II
STANDARD EQUIPMENT							
MyDINO Telematics	std	std	std	std	std	std	std
230V AC-motor	std	std	std	std	-	-	-
24V DC-motor	-	-	-	-	std	std	std
Continuous rotation of the boom	std	std	std	std	std	std	std
Basket rotation	std, 180°	std, 180°	std, 180°	std, 90°	std, 180°	std, 180°	std, 180°
Driving system	std	std	std	std	std	std	std
AC socket in the basket x 2	std	std	std	std	std	std	std
USB power outlet in basket	std	std	std	std	std	std	std
Nose-wheel	std	std	std	std	std	std	std
Proportional controls	std	std	std	std	std	std	std
Hour meter	std	std	std	std	std	std	std
Activated emergency circuit-LED	std	std	std	std	std	std	std
Easy-entry gate in basket, exchangeable finger protection	std	std	std	std	std	std	std
Stone chip protection tape (for front outriggers)	std	std	std	std	std	std	std
OPTIONS							
Petrol engine	option	option	std	std	-	-	-
Diesel engine	option	option	option	option	-	-	-
2.2kW generator +bracket (A)	-	-	-	-	option	option	option
2 joystick controls	option	option	option	std	option	option	option
Lockable tool/harness box	option	option	option	option	option	option	option
Extra outrigger pads + bracket, 500x500x40 (A)	option	option	option	-	option	option	option
LED Outrigger support indicator	option	option	option	std	option	option	option
Remote control for driving & automatic levelling (B)	option	option	option	std	option	option	option
Remote control for driving & automatic levelling & hydraulic coupling of traction drive on/off (B)	option	option	option	std	option	option	option
Special colour	option	option	option	option	option	option	option
DINO Safe Guard, secondary guarding, including AV warning	option	option	option	option	option	option	option
DINO SkyRack, plate & tube rack, max loading 100kg, 3m²	option	option	option	-	option	option	option
LED traffic lights	option	option	option	option	option	option	option
LED working lights	option	option	option	option	option	option	option
Spare wheel with bracket (A)	option	option	option	option	option	option	option
Spare wheel only	option	option	option	option	option	option	option
12V power outlet in basket	option	option	option	option	-	-	-
Rack for tools & accessories	option	option	option	option	option	option	option
Towing eyelet (different models available)	option	option	option	option	option	option	option
Spikes for outrigger plates	option	option	option	option	option	option	option
Anemometer	option	option	option	option	option	option	option
Basket load sensor	option	option	option	option	option	option	option
Thermometer/ temperature limit switch	option	option	option	option	option	option	option

- not available

(A) in case more than one of the (A) marked option in the machine, please contact sales@dinolift.com

(B) includes tool/harness box, not possible to retrofit

Dinolift Oy | Raikkolantie 145 • FI-32210 LOIMAA, FINLAND

Tel: +358 (0)20 1772 400 • E-mail: info@dinolift.com

www.dinolift.com

Technical specifications are subject to change without prior notice.

©Dinolift Oy | 1.2.2024